




SUMITOMO

CARBIDE - CBN - DIAMOND

Coated Carbide Drills for Spot Facing

Flat MultiDrill MDF Series

Expansion

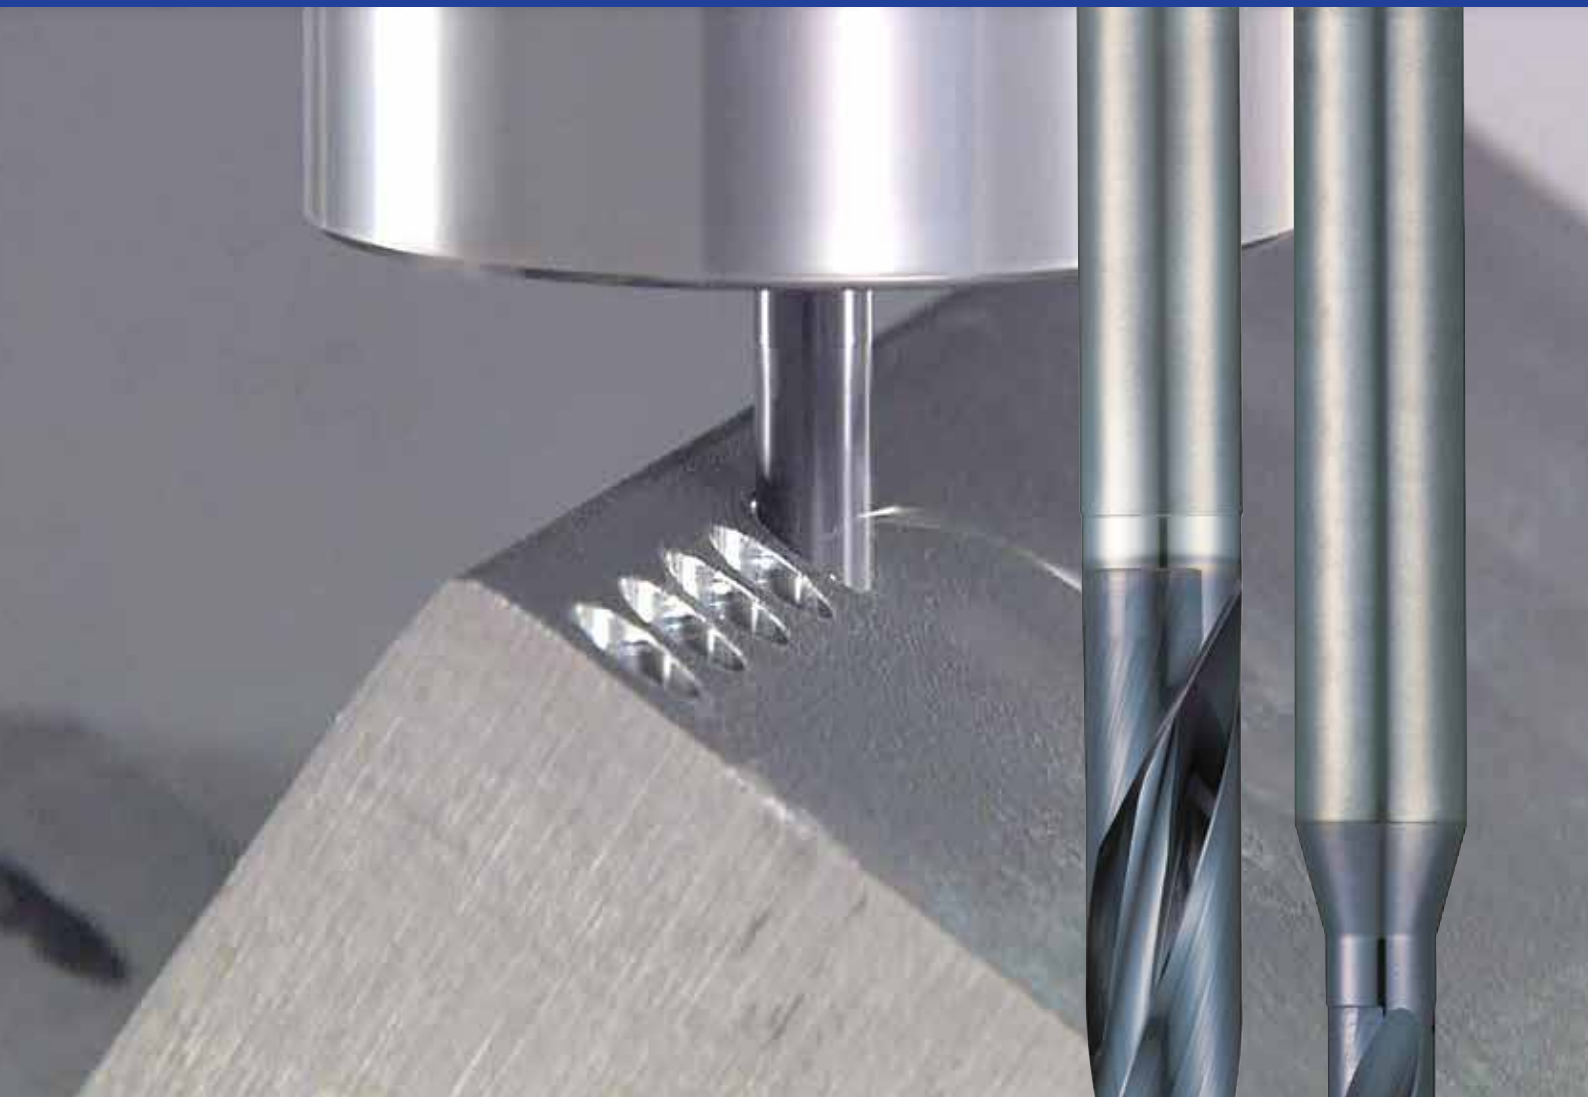

- Long Type Drills with Diameter Ø3,0mm - Ø20,0mm
- Flat MultiDrill with Coolant Hole (3D and 5D)
- Effective for inclined and curved surface spot drilling.
- Applicable for interrupted and cross drilling (thin plates and tubing).

Flat MultiDrill MDF Type

Coated Carbide Drills for Spot Facing



General Features

The flat MultiDrill MDF type is a coated solid carbide drill that can be used for various purposes including high-efficiency spot facing and drilling in inclined and curved surfaces.




Advantages

- **Can be used in a variety of drilling applications thanks to its point angle of 180°**
Applicable to high-efficiency spot facing, drilling in non-horizontal surfaces such as inclined and cylindrical surfaces and interrupted drilling. It also reduces burrs at hole exits.
- **Improved machining stability**
Achieves high rigidity by employing RS THINNING, which ensures web thickness on the bottom face.
- **Excellent chip evacuation performance**
Achieves excellent chip evacuation thanks to its wide chip pocket and high-quality rake face shape.
- **Excellent cutting edge strength**
Achieves excellent cutting edge strength thanks to optimized cutting edge design.
- **Expanded lineup of long type**
An expanded lineup of long type drills with diameters between Ø3,0 and Ø20,0mm that are capable of drilling with an overhang length up to L/D=10.
- **Expanded lineup of types with oil hole**
Supports internal coolant. For deeper drilling (3D, 5D).

Improves
drilling stability
by ensuring
web thickness.



Reduction of Burrs at Hole Exit



Work Material: 15CrMo5
Drill: MDF0500S2D (Ø5,0mm 2D)
Cutting Conditions: $v_c = 65\text{m/min}$, $f = 0,12\text{mm/rev}$
 $H = 10\text{mm}$, 150 holes, wet
Machine: Vertical machining center

Reduces exit burrs by more than half
compared to general-purpose drills




Burr height: 0,18mm
Flat MultiDrill MDF type




Burr height: 0,44mm
Conventional drill design


Applications




High-efficient spot facing




Hole expansion drilling




Drilling in non-horizontal surfaces
(such as inclined and cylindrical)




Interrupted drilling




Cross drilling



Pre-tap hole drilling in thin
sheets



Deep spot facing




Avoiding interference with
work materials

Long Shank Type (L2D Type)

For flat base drilling in long overhang conditions, hole expansion, burr prevention.
For deep flat base drilling and to avoid interference with workpiece.
Drilling that uses the long shank type requires a guide hole of the same diameter or a centering hole larger than the tool diameter.

Two types: (A) $\varnothing D_c < 6\text{mm}$ Stepped shank products

(B) $\varnothing D_c \geq 6\text{mm}$ Relief shank products

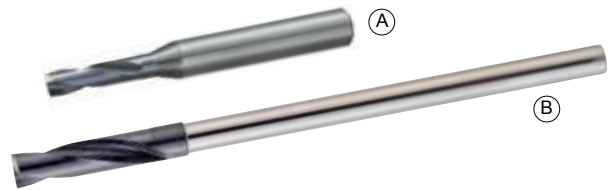


With Oil Hole (H3D Type / H5D Type)

Support for internal coolant allows for deeper flat hole drilling.
Drilling that uses oil hole L/D=5 requires a guide hole of the same diameter or a centering hole larger than the tool diameter.




Application Examples


Deep Spot Facing

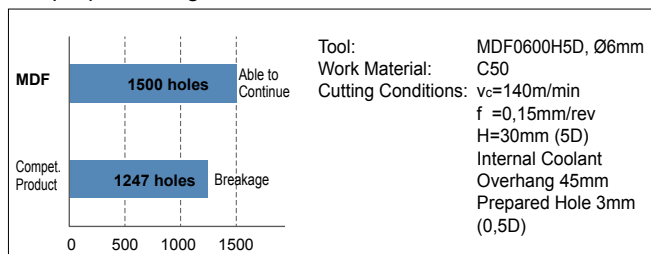


Long Overhang Spot Facing

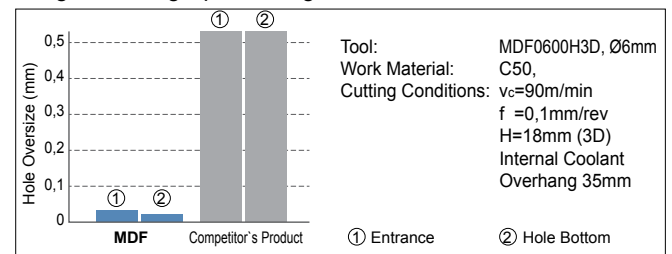

Inclined Surface Drilling

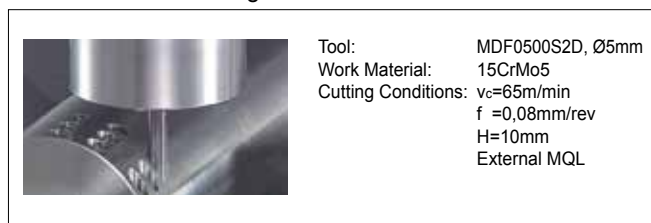

Controlling Burrs and Chips when Withdrawn

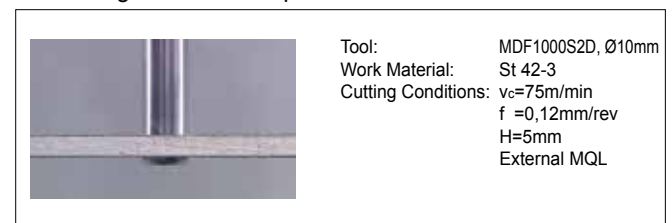

Using Flat Drills, General-Purpose Drills and Endmills

Tool	Flat Drill MDF Type	General Purpose Drill GS / HGS Type	Endmill for Spot Facing GSX MILL Slot
Hole Bottom Shape			
Drilling in horizontal surfaces	⊙ Feed rate approximately half of a general-purpose drill	⊙ Optimal	✗ Within 1D, limited to low feed rate Feed rate one-fifth or lower of a general-purpose drill
Drilling in non-horizontal surfaces	⊙ Optimal (within 2D is recommended)	✗ Unusable	⊙ Within 1D, limited to low feed rate Feed rate half or lower of a flat drill
Traversing	✗ Unusable	✗ Unusable	⊙ Optimal

Series

Application	Series	Diameter Range (mm)	Hole Depth (L/D)
External	MDF □□□□ S2D	$\varnothing 0,3 - \varnothing 20,0$	$\leq 2,0$
	MDF □□□□ L2D	$\varnothing 3,0 - \varnothing 20,0$	$\leq 2,0$
Internal	MDF □□□□ H3D	$\varnothing 3,0 - \varnothing 16,0$	$\leq 3,0$
	MDF □□□□ H5D	$\varnothing 3,0 - \varnothing 16,0$	$\leq 5,0$

Flat MultiDrill MDF Type


MDF S2D Type

External Coolant Supply (MDF S2D Type)

Carbon Steel	Alloy Steel	Tempered Steel	Hardened Steel	Stainless Steel	Cast Iron	Ductile Cast Iron	Aluminum Alloy
○	○	○	○	○	○	○	○
<0.28%	>0.28%	<45HRC	>45HRC	Steel	Iron	Cast Iron	Alloy



● MDF Type

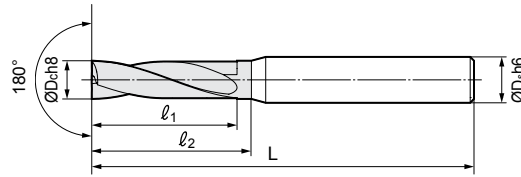

● Diameter ØDc: 0,3 ~ 7,0mm

Diameter ØDc (mm)	Shank ØDs (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	l ₁	l ₂
0,3*	3,0	MDF 0030S2D	○	40	1,0	1,3
0,4*		0040S2D	○		1,4	1,8
0,5	3,0	MDF 0050S2D	○	40	2,0	2,2
0,6		0060S2D	○		2,4	2,6
0,7		0070S2D	○		2,8	3,1
0,8		0080S2D	○		3,2	3,5
0,9	3,0	0090S2D	○	45	3,6	4,0
1,0		MDF 0100S2D	●		4,0	4,4
1,1		0110S2D	○		4,4	4,8
1,2		0120S2D	○		4,8	5,3
1,3		0130S2D	○		5,2	5,7
1,4		0140S2D	○		5,6	6,2
1,5	3,0	MDF 0150S2D	●	45	6,0	6,6
1,6		0160S2D	○		6,4	7,0
1,7		0170S2D	○		6,8	7,5
1,8		0180S2D	○		7,2	7,9
1,9		0190S2D	○		7,6	8,4
2,0	4,0	MDF 0200S2D	●	50	8,0	8,8
2,1		0210S2D	●		8,4	9,2
2,2		0220S2D	●		8,8	9,7
2,3		0230S2D	●		9,2	10,1
2,4		0240S2D	●		9,6	10,6
2,5	4,0	MDF 0250S2D	●	50	10,0	11,0
2,6		0260S2D	●		10,4	11,4
2,7		0270S2D	●		10,8	11,9
2,8		0280S2D	●		11,2	12,3
2,9		0290S2D	●		11,6	12,8
3,0	6,0	MDF 0300S2D	●	50	12,0	13,2
3,1		0310S2D	●		12,4	13,6
3,2		0320S2D	●		12,8	14,1
3,3		0330S2D	●		13,2	14,5
3,4		0340S2D	●		13,6	15,0
3,5	6,0	0350S2D	●	50	14,0	15,4
3,6		MDF 0360S2D	●		14,4	15,8
3,7		0370S2D	●		14,8	16,3
3,8		0380S2D	●		15,2	16,7
3,9		0390S2D	●		15,6	17,2
4,0	6,0	0400S2D	●	60	16,0	17,6
4,1		MDF 0410S2D	●		16,4	18,0
4,2		0420S2D	●		16,8	18,5
4,3		0430S2D	●		17,2	18,9
4,4		0440S2D	●		17,6	19,4
4,5	6,0	0450S2D	●	60	18,0	19,8
4,6		MDF 0460S2D	●		18,4	20,2
4,7		0470S2D	●		18,8	20,7
4,8		0480S2D	●		19,2	21,1
4,9		0490S2D	●		19,6	21,6
5,0	6,0	0500S2D	●	60	20,0	22,0
5,1		MDF 0510S2D	●		20,4	22,4
5,2		0520S2D	●		20,8	22,9
5,3		0530S2D	●		21,2	23,3
5,4		0540S2D	●		21,6	23,8
5,5	6,0	0550S2D	●	60	22,0	24,2
5,6		MDF 0560S2D	●		22,4	24,6
5,7		0570S2D	●		22,8	25,1
5,8		0580S2D	●		23,2	25,5
5,9		0590S2D	●		23,6	26,0
6,0	8,0	0600S2D	●	70	24,0	26,4
6,1		MDF 0610S2D	●		24,4	26,8
6,2		0620S2D	●		24,8	27,3
6,3		0630S2D	●		25,2	27,7
6,4		0640S2D	●		25,6	28,2
6,5	8,0	0650S2D	●	70	26,0	28,6
6,6		MDF 0660S2D	●		26,4	29,0
6,7		0670S2D	●		26,8	29,5
6,8		0680S2D	●		27,2	29,9
6,9		0690S2D	●		27,6	30,4
7,0		0700S2D	●		28,0	30,8

● Diameter ØDc: 7,1 ~ 20,0mm



Diameter ØDc (mm)	Shank ØDs (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	l ₁	l ₂
7,1	8,0	MDF 0710S2D	●	70	28,4	31,2
7,2		0720S2D	●		28,8	31,7
7,3		0730S2D	●		29,2	32,1
7,4		0740S2D	●		29,6	32,6
7,5		0750S2D	●		30,0	33,0
7,6	8,0	MDF 0760S2D	●	70	30,4	33,4
7,7		0770S2D	●		30,8	33,9
7,8		0780S2D	●		31,2	34,3
7,9		0790S2D	●		31,6	34,8
8,0		0800S2D	●		32,0	35,2
8,1	10,0	MDF 0810S2D	○	80	32,4	35,6
8,2		0820S2D	○		32,8	36,1
8,3		0830S2D	○		33,2	36,5
8,4		0840S2D	○		33,6	37,0
8,5		0850S2D	●		34,0	37,4
8,6	10,0	MDF 0860S2D	○	80	34,4	37,8
8,7		0870S2D	○		34,8	38,3
8,8		0880S2D	○		35,2	38,7
8,9		0890S2D	○		35,6	39,2
9,0		0900S2D	●		36,0	39,6
9,1	10,0	MDF 0910S2D	○	80	36,4	40,0
9,2		0920S2D	○		36,8	40,5
9,3		0930S2D	○		37,2	40,9
9,4		0940S2D	○		37,6	41,4
9,5		0950S2D	●		38,0	41,8
9,6	10,0	MDF 0960S2D	○	80	38,4	42,2
9,7		0970S2D	○		38,8	42,7
9,8		0980S2D	○		39,2	43,1
9,9		0990S2D	○		39,6	43,6
10,0		1000S2D	●		40,0	44,0
10,1	12,0	MDF 1010S2D	○	90	40,4	44,4
10,2		1020S2D	○		40,8	44,9
10,3		1030S2D	○		41,2	45,3
10,4		1040S2D	○		41,6	45,8
10,5		1050S2D	●		42,0	46,2
10,6	12,0	MDF 1060S2D	○	90	42,4	46,6
10,7		1070S2D	○		42,8	47,1
10,8		1080S2D	○		43,2	47,5
10,9		1090S2D	○		43,6	48,0
11,0		1100S2D	●		44,0	48,4
11,1	12,0	MDF 1110S2D	○	90	44,4	48,8
11,2		1120S2D	○		44,8	49,3
11,3		1130S2D	○		45,2	49,7
11,4		1140S2D	○		45,6	50,2
11,5		1150S2D	●		46,0	50,6
11,6	12,0	MDF 1160S2D	○	90	46,4	51,0
11,7		1170S2D	○		46,8	51,5
11,8		1180S2D	○		47,2	51,9
11,9		1190S2D	○		47,6	52,4
12,0		1200S2D	●		48,0	52,8
12,5	14,0	MDF 1250S2D	○	100	50,0	54,0
13,0		1300S2D	○		52,0	56,8
13,5		1350S2D	○		54,0	59,6
14,0	16,0	1400S2D	○	110	56,0	62,4
14,5		MDF 1450S2D	○		58,0	65,2
15,0		1500S2D	○		60,0	68,0
15,5	18,0	1550S2D	○	115	62,0	70,8
16,0		1600S2D	○		64,0	73,6
16,5		MDF 1650S2D	○		66,0	72,4
17,0	20,0	1700S2D	○	125	68,0	75,2
17,5		1750S2D	○		70,0	78,0
18,0		1800S2D	○		72,0	80,8
18,5	20,0	MDF 1850S2D	○	140	74,0	83,6
19,0		1900S2D	○		76,0	86,4
19,5		1950S2D	○		78,0	89,2
20,0		2000S2D	○		80,0	92,0

*RS Thinning is used for ØDc ≥ 0,5mm.

Grade: ACF75

● Euro stock ○ Japan stock

External Coolant Supply (MDF L2D Type, Long Type)

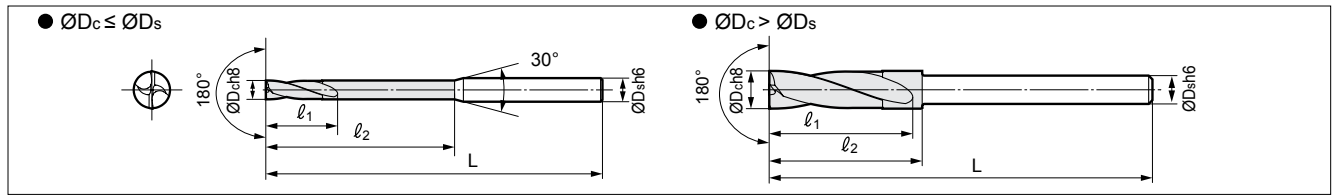

● Diameter $\varnothing D_c$: 3,0 ~ 9,5mm

Diameter $\varnothing D_c$ (mm)	Shank $\varnothing D_s$ (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	ℓ_1	ℓ_2
3,0	6,0	MDF 0300L2D	○	100	13,5	30,0
3,1		0310L2D	○		14,0	31,0
3,2		0320L2D	○		14,4	32,0
3,3		0330L2D	○		14,9	33,0
3,4		0340L2D	○		15,3	34,0
3,5		0350L2D	○		15,8	35,0
3,6	6,0	MDF 0360L2D	○	100	16,2	36,0
3,7		0370L2D	○		16,7	37,0
3,8		0380L2D	○		17,1	38,0
3,9		0390L2D	○		17,6	39,0
4,0		0400L2D	○		18,0	40,0
4,1		MDF 0410L2D	○	100	18,5	41,0
4,2	6,0	0420L2D	○		18,9	42,0
4,3		0430L2D	○		19,4	43,0
4,4		0440L2D	○		19,8	44,0
4,5		0450L2D	○		20,3	45,0
4,6		MDF 0460L2D	○	100	20,7	46,0
4,7	6,0	0470L2D	○		21,2	47,0
4,8		0480L2D	○		21,6	48,0
4,9		0490L2D	○		22,1	49,0
5,0		0500L2D	○		22,5	50,0
5,1		MDF 0510L2D	○	110	23,0	51,0
5,2	6,0	0520L2D	○		23,4	52,0
5,3		0530L2D	○		23,9	53,0
5,4		0540L2D	○		24,3	54,0
5,5		0550L2D	○		24,8	55,0
5,6		MDF 0560L2D	○	110	25,2	56,0
5,7	6,0	0570L2D	○		25,7	57,0
5,8		0580L2D	○		26,1	58,0
5,9		0590L2D	○		26,6	59,0
6,0	5,0	MDF 0600L2DS5	○	110	27,0	30,0
6,0	6,0	MDF 0600L2D	○	110	27,0	60,0
6,1	6,0	MDF 0610L2D	○	120	27,5	30,5
6,2		0620L2D	○		27,9	30,9
6,3		0630L2D	○		28,4	31,4
6,4		0640L2D	○		28,8	31,8
6,5		0650L2D	○		29,3	32,3
6,6		MDF 0660L2D	○	120	29,7	32,7
6,7	6,0	0670L2D	○		30,2	33,2
6,8		0680L2D	○		30,6	33,6
6,9		0690L2D	○		31,1	34,1
7,0		0700L2D	○		31,5	34,5
7,1		MDF 0710L2D	○	130	32,0	35,0
7,2	6,0	0720L2D	○		32,4	35,4
7,3		0730L2D	○		32,9	35,9
7,4		0740L2D	○		33,3	36,3
7,5		0750L2D	○		33,8	36,8
7,6		MDF 0760L2D	○	130	34,2	37,2
7,7	6,0	0770L2D	○		34,7	37,7
7,8		0780L2D	○		35,1	38,1
7,9		0790L2D	○		35,6	38,6
8,0	6,0	MDF 0800L2DS6	○	130	36,0	39,0
8,0	8,0	MDF 0800L2D	○	130	36,0	80,0
8,1	8,0	MDF 0810L2D	○	140	36,5	39,5
8,2		0820L2D	○		36,9	39,9
8,3		0830L2D	○		37,4	40,4
8,4		0840L2D	○		37,8	40,8
8,5		0850L2D	○		38,3	41,3
8,6		MDF 0860L2D	○	140	38,7	41,7
8,7	8,0	0870L2D	○		39,2	42,2
8,8		0880L2D	○		39,6	42,6
8,9		0890L2D	○		40,1	43,1
9,0		0900L2D	○		40,5	43,5
9,1		MDF 0910L2D	○	150	41,0	44,0
9,2	8,0	0920L2D	○		41,4	44,4
9,3		0930L2D	○		41,9	44,9
9,4		0940L2D	○		42,3	45,3
9,5		0950L2D	○		42,8	45,8

● Diameter $\varnothing D_c$: 9,6 ~ 20,0mm

Diameter $\varnothing D_c$ (mm)	Shank $\varnothing D_s$ (mm)	Cat. No.	Stock	Dimensions (mm)		
				L	ℓ_1	ℓ_2
9,6	8,0	MDF 0960L2D	○	150	43,2	46,2
9,7		0970L2D	○		43,7	46,7
9,8		0980L2D	○		44,1	47,1
9,9		0990L2D	○		44,6	47,6
10,0		MDF 1000L2DS8	○	150	45,0	48,0
10,0	10,0	MDF 1000L2D	○	150	45,0	100,0
10,1	10,0	MDF 1010L2D	○	160	45,5	48,5
10,2		1020L2D	○		45,9	48,9
10,3		1030L2D	○		46,4	49,4
10,4		1040L2D	○		46,8	49,8
10,5		1050L2D	○		47,3	50,3
10,6		MDF 1060L2D	○	160	47,7	50,7
10,7	10,0	1070L2D	○		48,2	51,2
10,8		1080L2D	○		48,6	51,6
10,9		1090L2D	○		49,1	52,1
11,0		1100L2D	○		49,5	52,5
11,1		MDF 1110L2D	○	170	50,0	53,0
11,2	10,0	1120L2D	○		50,4	53,4
11,3		1130L2D	○		50,9	53,9
11,4		1140L2D	○		51,3	54,3
11,5		1150L2D	○		51,8	54,8
11,6		MDF 1160L2D	○	170	52,2	55,2
11,7	10,0	1170L2D	○		52,7	55,7
11,8		1180L2D	○		53,1	56,1
11,9		1190L2D	○		53,6	56,6
12,0		MDF 1200L2DS10	○	170	54,0	57,0
12,0	12,0	MDF 1200L2D	○	170	54,0	120,0
12,5	12,0	MDF 1250L2D	○	180	56,3	59,3
13,0		1300L2D	○		58,5	61,5
13,5		1350L2D	○		60,8	63,8
14,0		MDF 1400L2DS12	○	190	63,0	66,0
14,0		MDF 1400L2D	○	190	63,0	140,0
14,5		MDF 1450L2D	○	200	65,3	68,3
15,0	14,0	1500L2D	○		67,5	70,5
15,5		1550L2D	○		69,8	72,8
16,0		MDF 1600L2DS14	○	210	72,0	75,0
16,0		MDF 1600L2D	○	210	72,0	160,0
16,5		MDF 1650L2D	○	220	74,3	77,3
17,0	16,0	1700L2D	○		76,5	79,5
17,5		1750L2D	○		78,8	81,8
18,0		MDF 1800L2DS16	○	230	81,0	84,0
18,0		MDF 1800L2D	○	230	81,0	180,0
18,5		MDF 1850L2D	○	240	83,3	86,3
19,0	18,0	1900L2D	○		85,5	88,5
19,5		1950L2D	○		87,8	90,8
20,0		MDF 2000L2DS18	○	250	90,0	93,0
20,0		MDF 2000L2D	○	250	90,0	200,0

○ Japan stock

Grade: ACF75

Drilling that uses this tool requires a guide hole of the same diameter or a centering hole larger than the tool diameter.

Flat MultiDrill

MDF Type

MDF Recommended Cutting Conditions

Recommended Cutting Conditions

MDF S2D Type

1. The recommended hole depth is 2 x D_c. The depth shall be the depth from the highest point of the hole when drilling inclined surfaces.
2. The recommended cutting conditions are those for drilling in flat horizontal surfaces.
3. Adjust the feed rate according to the inclination angle when drilling in an inclined surface.
 - 3.1 Set the feed rate at ≤ 70% when the inclination angle is ≤ 30°
 - 3.2 Set the feed rate at ≤ 50% when the inclination angle is > 30°
4. This product is a drilling tool. Do not use it for traversing or helical milling

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØD _c (mm)	Cutting Conditions	Soft Steel / General Steel (~250HB)	Alloy Steel (~300HB)	Hardened Steel (~50HRC)	Stainless Steel (~200HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
~ Ø0,5	v _c	30 - 40 - 50	30 - 35 - 40	15 - 20 - 25	15 - 20 - 25	30 - 40 - 50	20 - 30 - 40	60 - 80 - 100
	f	0,004 - 0,005 - 0,006	0,004 - 0,005 - 0,006	0,001 - 0,002 - 0,003	0,003 - 0,004 - 0,005	0,004 - 0,005 - 0,006	0,001 - 0,003 - 0,005	0,003 - 0,005 - 0,007
~ Ø1,0	v _c	45 - 55 - 65	35 - 45 - 55	20 - 30 - 40	20 - 25 - 30	45 - 55 - 65	30 - 40 - 50	80 - 100 - 120
	f	0,01 - 0,03 - 0,05	0,01 - 0,03 - 0,05	0,002 - 0,006 - 0,01	0,005 - 0,007 - 0,01	0,01 - 0,03 - 0,05	0,005 - 0,01 - 0,015	0,01 - 0,02 - 0,03
~ Ø2,0	v _c	50 - 60 - 70	40 - 50 - 60	20 - 30 - 40	20 - 30 - 40	50 - 60 - 70	45 - 55 - 65	90 - 110 - 130
	f	0,02 - 0,04 - 0,06	0,02 - 0,04 - 0,06	0,01 - 0,018 - 0,025	0,01 - 0,015 - 0,02	0,02 - 0,04 - 0,06	0,015 - 0,03 - 0,045	0,03 - 0,05 - 0,07
~ Ø4,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 40	60 - 75 - 90	55 - 65 - 75	90 - 110 - 130
	f	0,06 - 0,08 - 0,10	0,05 - 0,08 - 0,10	0,01 - 0,02 - 0,03	0,01 - 0,02 - 0,03	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,06 - 0,08 - 0,10
~ Ø6,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,05 - 0,10 - 0,15	0,05 - 0,10 - 0,15	0,04 - 0,06 - 0,08	0,03 - 0,04 - 0,05	0,05 - 0,10 - 0,15	0,06 - 0,09 - 0,12	0,05 - 0,10 - 0,15
~ Ø8,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,10 - 0,15 - 0,20	0,10 - 0,15 - 0,20	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,10 - 0,15 - 0,20	0,10 - 0,12 - 0,15	0,10 - 0,15 - 0,20
~ Ø10,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,12 - 0,17 - 0,22	0,12 - 0,17 - 0,22	0,08 - 0,10 - 0,12	0,06 - 0,08 - 0,10	0,12 - 0,17 - 0,22	0,12 - 0,15 - 0,18	0,12 - 0,17 - 0,22
~ Ø12,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,15 - 0,20 - 0,25	0,15 - 0,20 - 0,25	0,12 - 0,15 - 0,18	0,08 - 0,10 - 0,12	0,15 - 0,20 - 0,25	0,15 - 0,18 - 0,20	0,15 - 0,20 - 0,25
~ Ø16,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,14 - 0,17 - 0,20	0,10 - 0,15 - 0,20	0,17 - 0,22 - 0,27	0,15 - 0,20 - 0,25	0,20 - 0,25 - 0,30
~ Ø20,0	v _c	60 - 75 - 90	50 - 65 - 80	20 - 30 - 40	20 - 30 - 50	60 - 75 - 90	60 - 70 - 80	90 - 110 - 130
	f	0,25 - 0,30 - 0,35	0,25 - 0,30 - 0,35	0,16 - 0,19 - 0,22	0,15 - 0,20 - 0,25	0,25 - 0,30 - 0,35	0,20 - 0,25 - 0,30	0,25 - 0,30 - 0,35

Min. - **Optimum** - Max.

MDF L2D Type, Long Type

1. Drilling that uses this tool requires a guide hole of the same diameter.
2. The cutting conditions are the recommended conditions with a guide hole.
3. The recommended hole depth is 5 x D_c. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
4. This product is a drilling tool. Do not use it for traversing or helical milling.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØD _c (mm)	Cutting Conditions	Soft Steel / General Steel (~250HB)	Alloy Steel (~300HB)	Hardened Steel (~50HRC)	Stainless Steel (~200HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
~ Ø4,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 40	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,06 - 0,08 - 0,10	0,05 - 0,08 - 0,10	0,01 - 0,02 - 0,03	0,01 - 0,02 - 0,03	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,06 - 0,08 - 0,10
~ Ø6,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,05 - 0,10 - 0,15	0,05 - 0,10 - 0,15	0,04 - 0,06 - 0,08	0,03 - 0,04 - 0,05	0,05 - 0,10 - 0,15	0,06 - 0,09 - 0,12	0,05 - 0,10 - 0,15
~ Ø8,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,10 - 0,15 - 0,20	0,10 - 0,15 - 0,20	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,10 - 0,15 - 0,20	0,10 - 0,12 - 0,15	0,10 - 0,15 - 0,20
~ Ø10,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,15 - 0,20 - 0,25	0,15 - 0,20 - 0,25	0,08 - 0,10 - 0,12	0,06 - 0,08 - 0,10	0,15 - 0,20 - 0,25	0,12 - 0,15 - 0,18	0,15 - 0,20 - 0,25
~ Ø12,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,12 - 0,15 - 0,18	0,08 - 0,10 - 0,12	0,17 - 0,22 - 0,27	0,15 - 0,20 - 0,25	0,20 - 0,25 - 0,30
~ Ø16,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,14 - 0,17 - 0,20	0,10 - 0,15 - 0,20	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,25 - 0,30 - 0,35
~ Ø20,0	v _c	60 - 80 - 100	50 - 70 - 90	20 - 30 - 40	20 - 30 - 50	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,25 - 0,30 - 0,35	0,25 - 0,30 - 0,35	0,16 - 0,19 - 0,22	0,15 - 0,20 - 0,25	0,30 - 0,35 - 0,40	0,25 - 0,30 - 0,35	0,35 - 0,40 - 0,45


Min. - **Optimum** - Max.

Flat MultiDrill

MDF Type


Internal Coolant Supply (MDF H3D/H5D Type)

● MDF Type 3D Single Margin

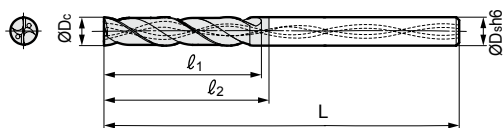


● Diameter ØDc: 3,0 ~ 6,0mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
3,0	3	3	MDF 0300H3D	●	68	13,5	16,5
		5	0300H5D	●	78	20,1	23,1
3,1	4	3	MDF 0310H3D	○	72	14,0	17,0
		5	0310H5D	○	86	20,8	23,8
3,2	4	3	0320H3D	○	72	14,4	17,4
		5	0320H5D	○	86	21,4	24,4
3,3	4	3	0330H3D	○	72	14,9	17,9
		5	0330H5D	○	86	22,1	25,1
3,4	4	3	0340H3D	○	72	15,3	18,3
		5	0340H5D	○	86	22,8	25,8
3,5	4	3	0350H3D	●	72	15,8	18,8
		5	0350H5D	●	86	23,5	26,5
3,6	4	3	MDF 0360H3D	○	72	16,2	19,2
		5	0360H5D	○	86	24,1	27,1
3,7	4	3	0370H3D	○	72	16,7	19,7
		5	0370H5D	○	86	24,8	27,8
3,8	4	3	0380H3D	○	72	17,1	20,1
		5	0380H5D	○	86	25,5	28,5
3,9	4	3	0390H3D	○	72	17,6	20,6
		5	0390H5D	○	86	26,1	29,1
4,0	4	3	0400H3D	●	72	18,0	21,0
		5	0400H5D	●	86	26,8	29,8
4,1	5	3	MDF 0410H3D	○	80	18,5	21,5
		5	0410H5D	○	98	27,5	30,5
4,2	5	3	0420H3D	○	80	18,9	21,9
		5	0420H5D	○	98	28,1	31,1
4,3	5	3	0430H3D	○	80	19,4	22,4
		5	0430H5D	○	98	28,8	31,8
4,4	5	3	0440H3D	○	80	19,8	22,8
		5	0440H5D	○	98	29,5	32,5
4,5	5	3	0450H3D	●	80	20,3	23,3
		5	0450H5D	●	98	30,2	33,2
4,6	5	3	MDF 0460H3D	○	80	20,7	23,7
		5	0460H5D	○	98	30,8	33,8
4,7	5	3	0470H3D	○	80	21,2	24,2
		5	0470H5D	○	98	31,5	34,5
4,8	5	3	0480H3D	○	80	21,6	24,6
		5	0480H5D	○	98	32,2	35,2
4,9	5	3	0490H3D	○	80	22,1	25,1
		5	0490H5D	○	98	32,8	35,8
5,0	5	3	0500H3D	●	80	22,5	25,5
		5	0500H5D	●	98	33,5	36,5
5,1	6	3	MDF 0510H3D	○	82	23,0	26,0
		5	0510H5D	○	100	34,2	37,2
5,2	6	3	0520H3D	○	82	23,4	26,4
		5	0520H5D	○	100	34,8	37,8
5,3	6	3	0530H3D	○	82	23,9	26,9
		5	0530H5D	○	100	35,5	38,5
5,4	6	3	0540H3D	○	82	24,3	27,3
		5	0540H5D	○	100	36,2	39,2
5,5	6	3	0550H3D	●	82	24,8	27,8
		5	0550H5D	●	100	36,9	39,9
5,6	6	3	MDF 0560H3D	○	82	25,2	28,2
		5	0560H5D	○	100	37,5	40,5
5,7	6	3	0570H3D	○	82	25,7	28,7
		5	0570H5D	○	100	38,2	41,2
5,8	6	3	0580H3D	○	82	26,1	29,1
		5	0580H5D	○	100	38,9	41,9
5,9	6	3	0590H3D	○	82	26,6	29,6
		5	0590H5D	○	100	39,5	42,5
6,0	6	3	0600H3D	●	82	27,0	30,0
		5	0600H5D	●	100	40,2	43,2



● MDF Type 5D Double Margin

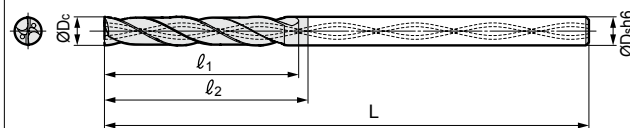

● Diameter ØDc: 6,1 ~ 9,0mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	l ₁	l ₂
6,1	7	3	MDF 0610H3D	○	88	27,5	30,5
		5	0610H5D	○	109	40,9	43,9
6,2	7	3	0620H3D	○	88	27,9	30,9
		5	0620H5D	○	109	41,5	44,5
6,3	7	3	0630H3D	○	88	28,4	31,4
		5	0630H5D	○	109	42,2	45,2
6,4	7	3	0640H3D	○	88	28,8	31,8
		5	0640H5D	○	109	42,9	45,9
6,5	7	3	0650H3D	●	88	29,3	32,3
		5	0650H5D	●	109	43,6	46,6
6,6	7	3	MDF 0660H3D	○	88	29,7	32,7
		5	0660H5D	○	109	44,2	47,2
6,7	7	3	0670H3D	○	88	30,2	33,2
		5	0670H5D	○	109	44,9	47,9
6,8	7	3	0680H3D	○	88	30,6	33,6
		5	0680H5D	○	109	45,6	48,6
6,9	7	3	0690H3D	○	88	31,1	34,1
		5	0690H5D	○	109	46,2	49,2
7,0	7	3	0700H3D	●	88	31,5	34,5
		5	0700H5D	●	109	46,9	49,9
7,1	8	3	MDF 0710H3D	○	94	32,0	35,0
		5	0710H5D	○	118	47,6	50,6
7,2	8	3	0720H3D	○	94	32,4	35,4
		5	0720H5D	○	118	48,2	51,2
7,3	8	3	0730H3D	○	94	32,9	35,9
		5	0730H5D	○	118	48,9	51,9
7,4	8	3	0740H3D	○	94	33,3	36,3
		5	0740H5D	○	118	49,6	52,6
7,5	8	3	0750H3D	●	94	33,8	36,8
		5	0750H5D	●	118	50,3	53,3
7,6	8	3	MDF 0760H3D	○	94	34,2	37,2
		5	0760H5D	○	118	50,9	53,9
7,7	8	3	0770H3D	○	94	34,7	37,7
		5	0770H5D	○	118	51,6	54,6
7,8	8	3	0780H3D	○	94	35,1	38,1
		5	0780H5D	○	118	52,3	55,3
7,9	8	3	0790H3D	○	94	35,6	38,6
		5	0790H5D	○	118	52,9	55,9
8,0	8	3	0800H3D	●	94	36,0	39,0
		5	0800H5D	●	118	53,6	56,6
8,1	9	3	MDF 0810H3D	○	100	36,5	39,5
		5	0810H5D	○	127	54,3	57,3
8,2	9	3	0820H3D	○	100	36,9	39,9
		5	0820H5D	○	127	54,9	57,9
8,3	9	3	0830H3D	○	100	37,4	40,4
		5	0830H5D	○	127	55,6	58,6
8,4	9	3	0840H3D	○	100	37,8	40,8
		5	0840H5D	○	127	56,3	59,3
8,5	9	3	0850H3D	●	100	38,3	41,3
		5	0850H5D	●	127	57,0	60,0
8,6	9	3	MDF 0860H3D	○	100	38,7	41,7
		5	0860H5D	○	127	57,6	60,6
8,7	9	3	0870H3D	○	100	39,2	42,2
		5	0870H5D	○	127	58,3	61,3
8,8	9	3	0880H3D	○	100	39,6	42,6
		5	0880H5D	○	127	59,0	62,0
8,9	9	3	0890H3D	○	100	40,1	43,1
		5	0890H5D	○	127	59,6	62,6
9,0	9	3	0900H3D	●	100	40,5	43,5
		5	0900H5D	●	127	60,3	63,3

● Euro stock

○ Japan stock


Grade: ACF75

Flat MultiDrill

MDF Type



MDF Type with Oil Hole - H3D / H5D

Internal Coolant Supply (MDF H3D/H5D Type)

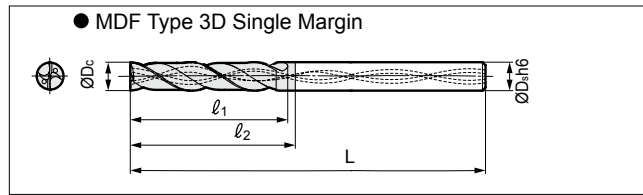

● Diameter ØDc: 9,1 ~ 12,0mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	ℓ ₁	ℓ ₂
9,1	10	3	MDF 0910H3D	○	106	41,0	44,0
		5	0910H5D	○	136	61,0	64,0
9,2	10	3	0920H3D	○	106	41,4	44,4
		5	0920H5D	○	136	61,6	64,6
9,3	10	3	0930H3D	○	106	41,9	44,9
		5	0930H5D	○	136	62,3	65,3
9,4	10	3	0940H3D	○	106	42,3	45,3
		5	0940H5D	○	136	63,0	66,0
9,5	10	3	0950H3D	●	106	42,8	45,8
		5	0950H5D	●	136	63,7	66,7
9,6	10	3	MDF 0960H3D	○	106	43,2	46,2
		5	0960H5D	○	136	64,3	67,3
9,7	10	3	0970H3D	○	106	43,7	46,7
		5	0970H5D	○	136	65,0	68,0
9,8	10	3	0980H3D	○	106	44,1	47,1
		5	0980H5D	○	136	65,7	68,7
9,9	10	3	0990H3D	○	106	44,6	47,6
		5	0990H5D	○	136	66,3	69,3
10,0	10	3	1000H3D	●	106	45,0	48,0
		5	1000H5D	●	136	67,0	70,0
10,1	11	3	MDF 1010H3D	○	116	45,5	48,5
		5	1010H5D	○	149	67,7	70,7
10,2	11	3	1020H3D	○	116	45,9	48,9
		5	1020H5D	○	149	68,3	71,3
10,3	11	3	1030H3D	○	116	46,4	49,4
		5	1030H5D	○	149	69,0	72,0
10,4	11	3	1040H3D	○	116	46,8	49,8
		5	1040H5D	○	149	69,7	72,7
10,5	11	3	1050H3D	●	116	47,3	50,3
		5	1050H5D	●	149	70,4	73,4
10,6	11	3	MDF 1060H3D	○	116	47,7	50,7
		5	1060H5D	○	149	71,0	74,0
10,7	11	3	1070H3D	○	116	48,2	51,2
		5	1070H5D	○	149	71,7	74,7
10,8	11	3	1080H3D	○	116	48,6	51,6
		5	1080H5D	○	149	72,4	75,4
10,9	11	3	1090H3D	○	116	49,1	52,1
		5	1090H5D	○	149	73,0	76,0
11,0	11	3	1100H3D	●	116	49,5	52,5
		5	1100H5D	●	149	73,7	76,7
11,1	12	3	MDF 1110H3D	○	122	50,0	53,0
		5	1110H5D	○	158	74,4	77,4
11,2	12	3	1120H3D	○	122	50,4	53,4
		5	1120H5D	○	158	75,0	78,0
11,3	12	3	1130H3D	○	122	50,9	53,9
		5	1130H5D	○	158	75,7	78,7
11,4	12	3	1140H3D	○	122	51,3	54,3
		5	1140H5D	○	158	76,4	79,4
11,5	12	3	1150H3D	●	122	51,8	54,8
		5	1150H5D	●	158	77,1	80,1
11,6	12	3	MDF 1160H3D	○	122	52,2	55,2
		5	1160H5D	○	158	77,7	80,7
11,7	12	3	1170H3D	○	122	52,7	55,7
		5	1170H5D	○	158	78,4	81,4
11,8	12	3	1180H3D	○	122	53,1	56,1
		5	1180H5D	○	158	79,1	82,1
11,9	12	3	1190H3D	○	122	53,6	56,6
		5	1190H5D	○	158	79,7	82,7
12,0	12	3	1200H3D	●	122	54,0	57,0
		5	1200H5D	●	158	80,4	83,4

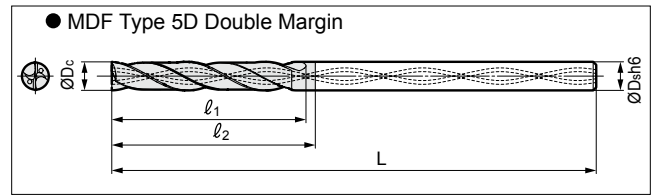

● Diameter ØDc: 12,5 ~ 16,0mm

Diameter ØDc (mm)	Shank ØDs (mm)	Hole Depth (L/D)	Cat. No.	Stock	Dimensions (mm)		
					L	ℓ ₁	ℓ ₂
12,5	13	3	MDF 1250H3D	○	128	56,3	59,3
		5	1250H5D	○	167	83,8	86,8
13,0	13	3	1300H3D	○	128	58,5	61,5
		5	1300H5D	○	167	87,1	90,1
13,5	14	3	MDF 1350H3D	○	134	60,8	63,8
		5	1350H5D	○	176	90,5	93,5
14,0	14	3	1400H3D	○	134	63,0	66,0
		5	1400H5D	○	176	93,8	96,8
14,5	15	3	MDF 1450H3D	○	140	65,3	68,3
		5	1450H5D	○	185	97,2	100,2
15,0	15	3	1500H3D	○	140	67,5	70,5
		5	1500H5D	○	185	100,5	103,5
15,5	16	3	MDF 1550H3D	○	146	69,8	72,8
		5	1550H5D	○	194	103,9	106,9
16,0	16	3	1600H3D	○	146	72,0	75,0
		5	1600H5D	○	194	107,2	110,2

● Euro stock

○ Japan stock

Grade: ACF75

Recommended Cutting Conditions

MDF Type with Oil Hole (H3D)

- The recommended hole depth is 3 x D_c. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
- The recommended cutting conditions are those for drilling on flat horizontal surfaces.
- Adjust the feed rate according to the inclination angle when drilling in an inclined surface.
 - Set the feed rate at ≤ 70% when the inclination angle is ≤ 30°.
 - Set the feed rate at ≤ 50% when the inclination angle is > 30°.
- This product is a drilling tool. Do not use it for traversing or helical milling.
- A guide hole of the same diameter is recommended when drilling stainless steel.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØD _c (mm)	Cutting Conditions	Soft Steel / General Steel (~250HB)	Alloy Steel (~300HB)	Hardened Steel (~50HRC)	Stainless Steel (~200HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
~ Ø4,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,06 - 0,08 - 0,10	0,05 - 0,08 - 0,10	0,01 - 0,02 - 0,03	0,01 - 0,02 - 0,03	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,06 - 0,08 - 0,10
~ Ø6,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	70 - 80 - 90	90 - 120 - 150
	f	0,05 - 0,10 - 0,15	0,05 - 0,10 - 0,15	0,04 - 0,06 - 0,08	0,03 - 0,04 - 0,05	0,05 - 0,10 - 0,15	0,06 - 0,09 - 0,12	0,05 - 0,10 - 0,15
~ Ø8,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	70 - 80 - 90	90 - 120 - 150
	f	0,10 - 0,15 - 0,20	0,10 - 0,15 - 0,20	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,10 - 0,15 - 0,20	0,10 - 0,12 - 0,15	0,10 - 0,15 - 0,20
~ Ø10,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	70 - 80 - 90	90 - 120 - 150
	f	0,12 - 0,17 - 0,22	0,12 - 0,17 - 0,22	0,08 - 0,10 - 0,12	0,06 - 0,08 - 0,10	0,12 - 0,17 - 0,22	0,12 - 0,15 - 0,18	0,15 - 0,20 - 0,25
~ Ø12,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	70 - 80 - 90	90 - 120 - 150
	f	0,15 - 0,20 - 0,25	0,15 - 0,20 - 0,25	0,12 - 0,15 - 0,18	0,08 - 0,10 - 0,12	0,15 - 0,20 - 0,25	0,15 - 0,18 - 0,20	0,20 - 0,25 - 0,30
~ Ø16,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	70 - 80 - 90	90 - 120 - 150
	f	0,15 - 0,20 - 0,25	0,15 - 0,20 - 0,25	0,12 - 0,15 - 0,18	0,10 - 0,15 - 0,20	0,17 - 0,22 - 0,27	0,15 - 0,20 - 0,25	0,25 - 0,30 - 0,40

Min. - **Optimum** - Max.

MDF Type with Oil Hole (H5D)

- Drilling that uses this tool requires a guide hole of the same diameter.
- The cutting conditions are the recommended conditions with a guide hole.
- The recommended hole depth is 5 x D_c. The depth is measured from the highest point of the hole on drilling in inclined surfaces.
- This product is a drilling tool. Do not use it for traversing or helical milling.

(v_c: Cutting Speed m/min f: Feed Rate mm/rev)

Drill Diam. ØD _c (mm)	Cutting Conditions	Soft Steel / General Steel (~250HB)	Alloy Steel (~300HB)	Hardened Steel (~50HRC)	Stainless Steel (~200HB)	Gray Cast Iron FC250	Ductile Cast Iron	Aluminium Alloy
~ Ø4,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,06 - 0,08 - 0,10	0,05 - 0,08 - 0,10	0,01 - 0,02 - 0,03	0,01 - 0,02 - 0,03	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,06 - 0,08 - 0,10
~ Ø6,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,05 - 0,10 - 0,15	0,05 - 0,10 - 0,15	0,04 - 0,06 - 0,08	0,03 - 0,04 - 0,05	0,05 - 0,10 - 0,15	0,06 - 0,09 - 0,12	0,05 - 0,10 - 0,15
~ Ø8,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,10 - 0,15 - 0,20	0,10 - 0,15 - 0,20	0,06 - 0,08 - 0,10	0,04 - 0,06 - 0,08	0,10 - 0,15 - 0,20	0,10 - 0,12 - 0,15	0,10 - 0,15 - 0,20
~ Ø10,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,15 - 0,20 - 0,25	0,15 - 0,20 - 0,25	0,08 - 0,10 - 0,12	0,06 - 0,08 - 0,10	0,15 - 0,20 - 0,25	0,12 - 0,15 - 0,18	0,15 - 0,20 - 0,25
~ Ø12,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,12 - 0,15 - 0,18	0,08 - 0,10 - 0,12	0,17 - 0,22 - 0,27	0,15 - 0,20 - 0,25	0,20 - 0,25 - 0,30
~ Ø16,0	v _c	70 - 85 - 100	60 - 75 - 90	30 - 40 - 50	25 - 35 - 45	70 - 85 - 100	65 - 75 - 85	90 - 120 - 150
	f	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,14 - 0,17 - 0,20	0,10 - 0,15 - 0,20	0,20 - 0,25 - 0,30	0,20 - 0,25 - 0,30	0,25 - 0,30 - 0,35


Min. - **Optimum** - Max.

Flat MultiDrill MDF Type

Coated Carbide Drills for Spot Facing

Application Examples


34CrMo4, Gear Frame Component

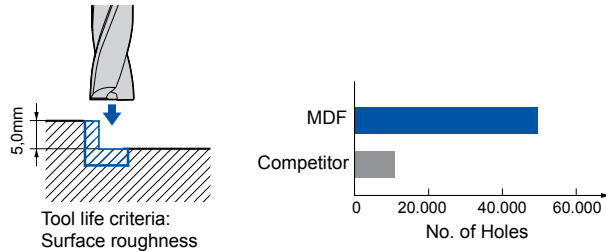

4 times longer tool life compared to competitor's.

Drill: MDF0500S2D (Ø5,0mm)
 $v_c = 65\text{m/min}$, $f = 0,10\text{mm/rev}$
 Cutting Conditions: $v_r = 414\text{mm/min}$, $H = 5\text{mm}$ (Blind hole)
 External Coolant


15CrMo5, Gear Component

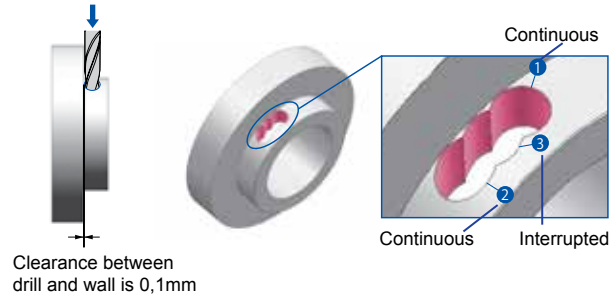

Stable drilling is achieved for non planar surface.

Drill: MDF0600S2D (Ø6,0mm)
 $v_c = 65\text{m/min}$, $f = 0,04\sim0,15\text{mm/rev}$
 Cutting Conditions: $v_r = 138\sim518\text{mm/min}$, $H = \sim15\text{mm}$ (Through)
 External Coolant


C35, Automotive Component

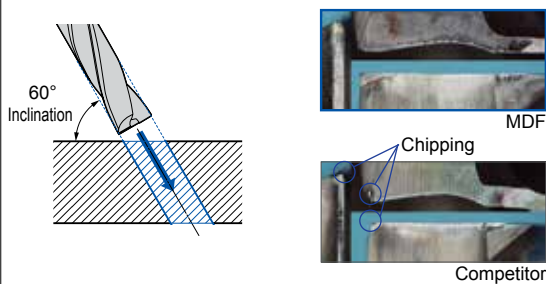

Reduces cutting edge damage to enable stable machining.

Drill: MDF0300S2D (Ø3,0mm)
 $v_c = 80\text{m/min}$, $f = 0,045\text{mm/rev}$
 Cutting Conditions: $v_r = 370\text{mm/min}$, $H = 8\text{mm}$ (Through)
 External Coolant

Cr-Mo Steels, Jig Component

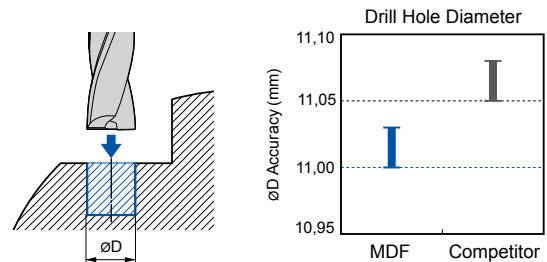

The stable geometry of the drill leads to high accuracy.

Drill: MDF1100S2D (Ø11,0mm)
 $v_c = 60\text{m/min}$, $f = 0,2\text{mm/rev}$
 Cutting Conditions: $v_r = 347\text{mm/min}$, $H = 11\text{mm}$ (Blind hole)
 External Coolant



(Germany)
 SUMITOMO ELECTRIC Hartmetall GmbH
 Konrad-Zuse-Straße 9, 47877 Willich

Tel. +49(0)2154 4992-0, Fax +49(0)2154 4992-161
 Info@SumitomoTool.com
 www.SumitomoTool.com



(UK and Ireland)
 SUMITOMO ELECTRIC Hardmetal Ltd.
 Summerleys Road, Princes Risborough
 Buckinghamshire HP27 9PW, UK

Tel. +44(0)1844 342081, Fax: +44(0)1844 342415
 enquiries@sumitomo-hardmetal.co.uk
 www.SumitomoTool.com



Distributed by: