


Coated Grade for High Precision Small Parts Turning


AC1030U

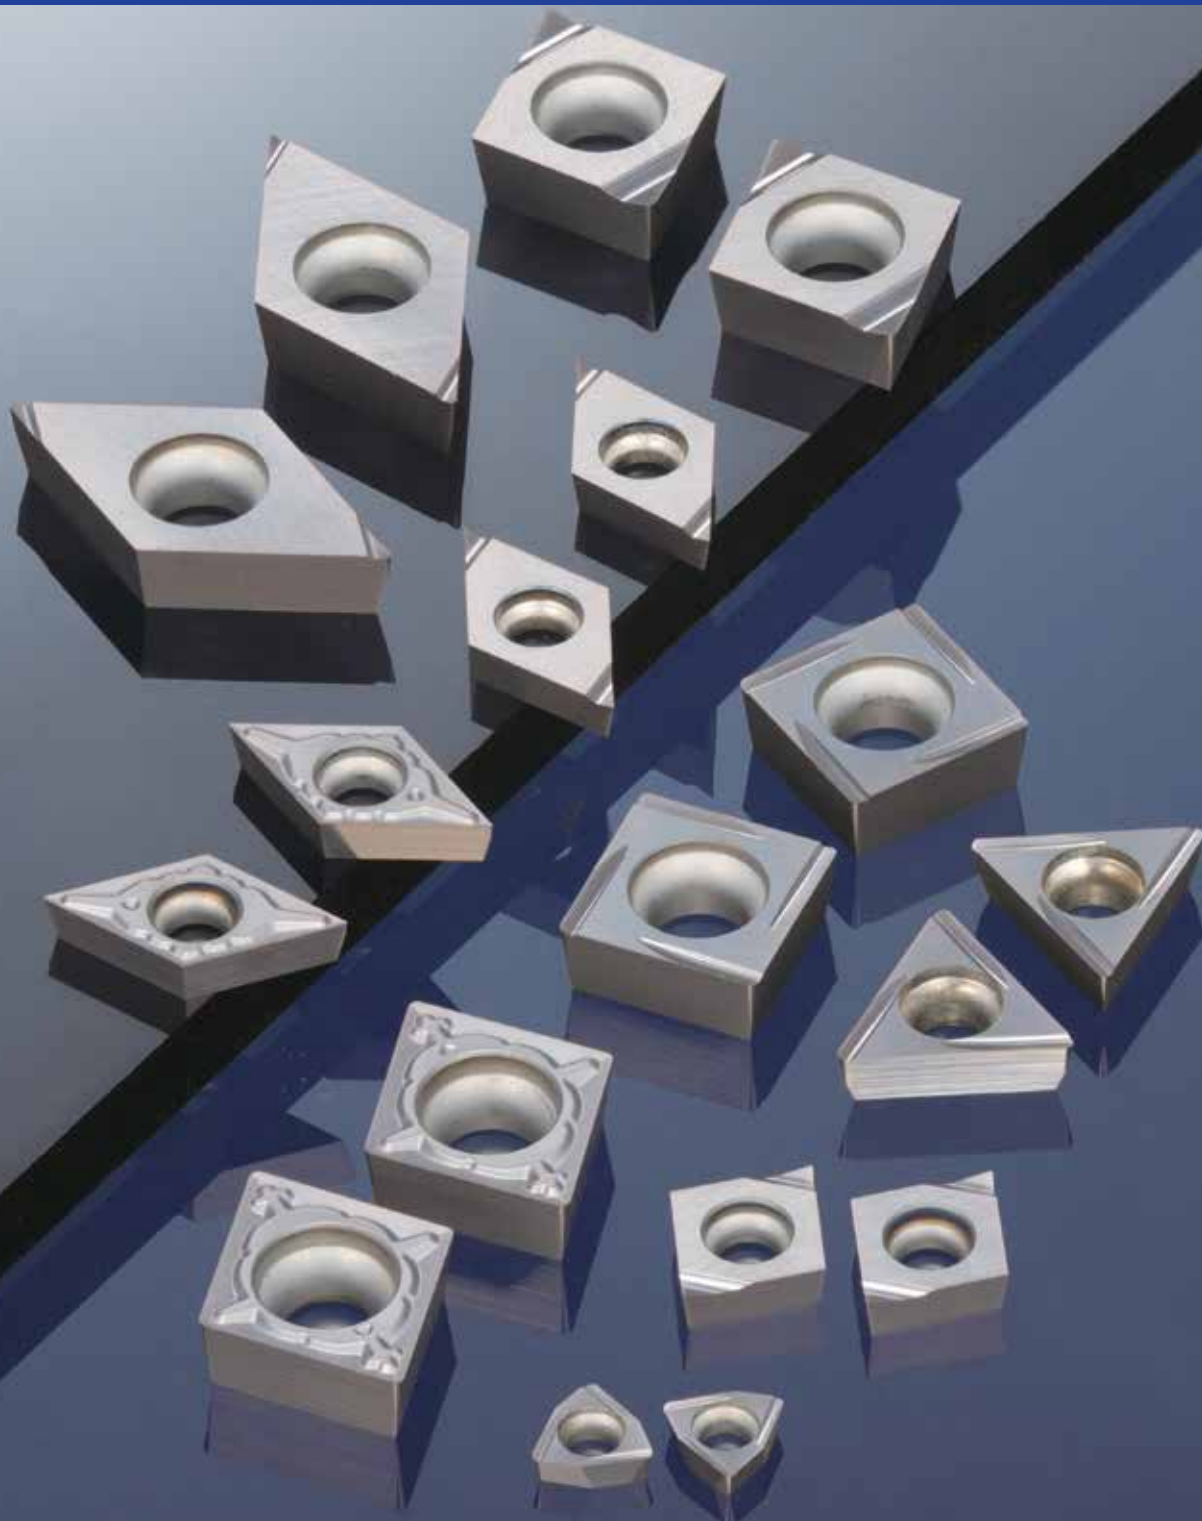

For High Precision Turning

AC1030U


Application Range

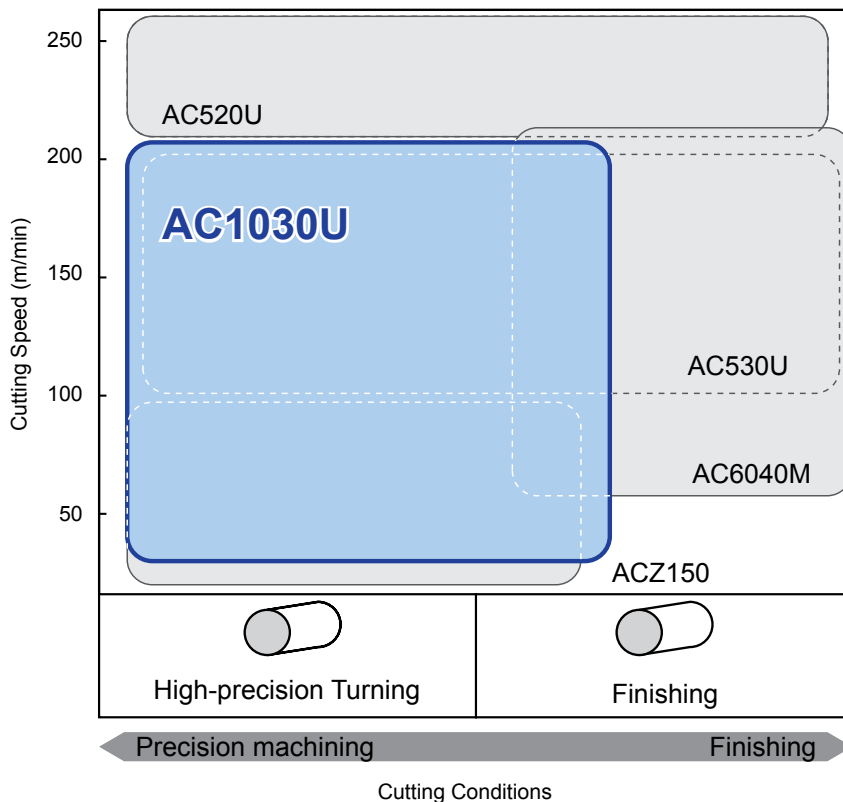

AC1030U


- New PVD coating „Absotech Bronze“ and special substrate are applied
- High quality cutting edge realizes excellent resistance against adhesion and micro chipping
- Better finished surface quality
- High performance turning of small precision parts
- Suitable for small inner diameter grooving applications

Excellent Wear and Chipping Resistance


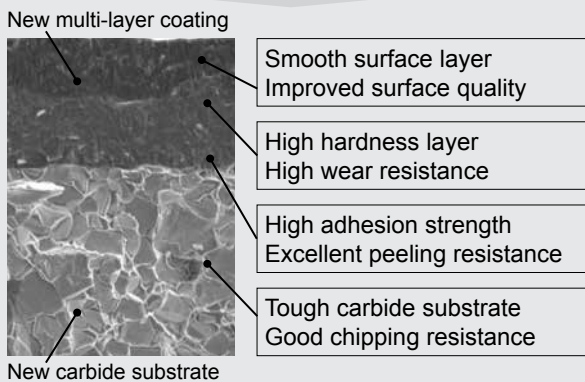


Excellent Surface Finish Quality

High quality chip breaker by precision grinding

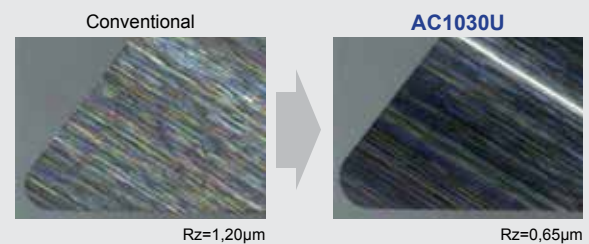


Inhibit micro chipping and adhesion

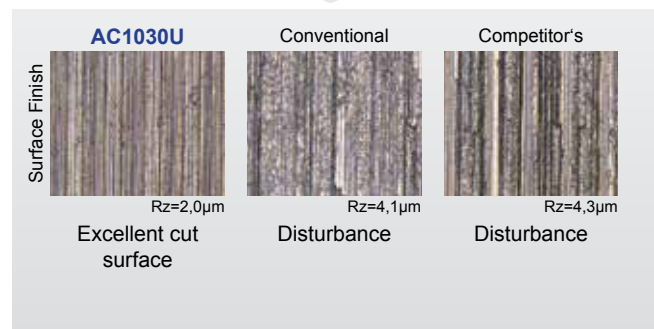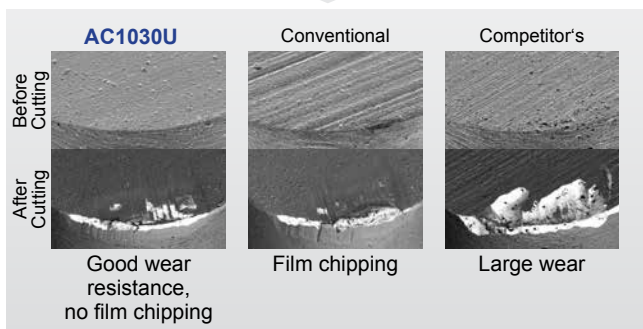


Material: 34CrMo4, OD finishing
Insert: DCGT11T302RFY (AC1030U)
Cutting Data: $v_c=50\text{m/min}$, $f=0,05\text{mm/rev}$, $a_p=0,1\text{mm}$, wet

Cutting Performance

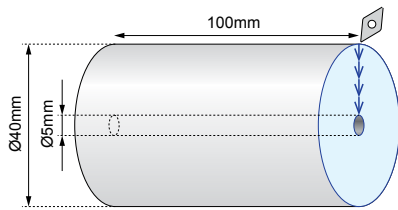


Material: X5CrNiS18-10, 1.4301
 Insert: DCGT11T302 RFY (AC1030U)
 Cutting Data: $v_c=100\text{m/min}$, $f=0,05\text{mm/rev}$, $a_p=0,1\text{mm}$, wet (Oil)

Wear Resistance




Roughness

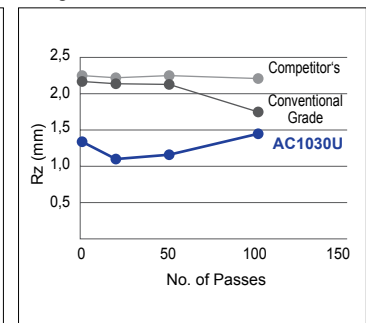


Application Examples

STKM12C-EC, Pipe

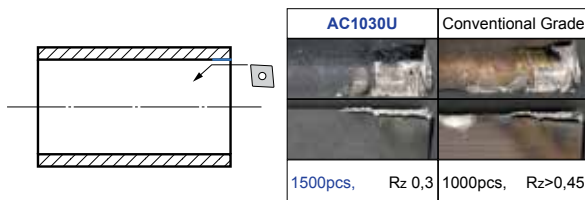


Insert: CCGT060201 LFX (AC1030U)
 Cutting Data: $v_c=196\text{m/min}$, $f=0,04\text{mm/rev}$, $a_p=0,4\text{mm}$, wet

C45, Stator Shaft

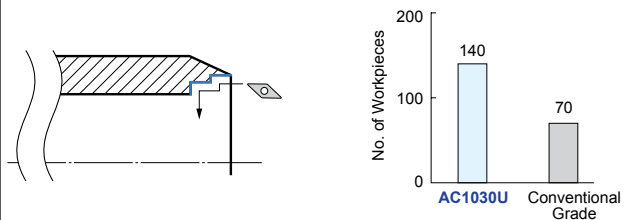


Insert: VCGT110302 RFX (AC1030U)
 Cutting Data: $v_c=195\text{m/min}$, $f=0,12\text{mm/rev}$, $a_p=0,175-0,25\text{mm}$, wet

X5CrNiS18-10, 1.4301, Valve Body

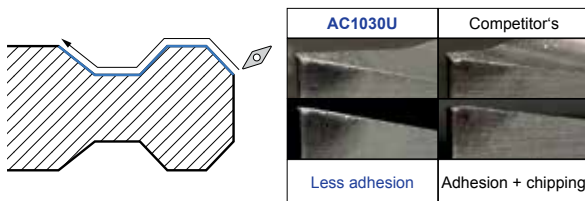

Insert: VCGT110301 RFY (AC1030U)
 Cutting Data: $v_c=31,5\text{m/min}$, $f=0,025\text{mm/rev}$, $a_p=0,2\text{mm}$, wet


X6Cr17, Sensor Housing

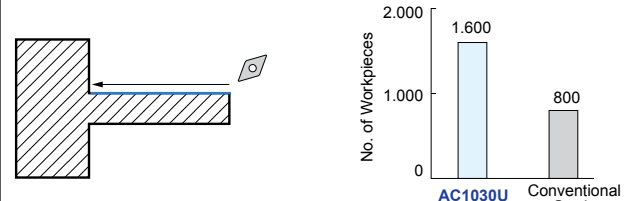


Insert: DCGT11T304M NFC (AC1030U)
 Cutting Data: $v_c=50\text{m/min}$, $f=0,06\text{mm/rev}$, $a_p=0,2\text{mm}$, wet

Application Range

G-Class Chipbreaker (Groove Design)



G-Class Chipbreaker (3D Design)



Recommended Cutting Conditions

Work Material Grade	P Free Cutting Steel		P Carbon Steel		M Stainless Steel		N Non-Ferrous Metals	
	v_c (m/min)	f (mm/rev)	v_c (m/min)	f (mm/rev)	v_c (m/min)	f (mm/rev)	v_c (m/min)	f (mm/rev)
AC1030U	50 ~ 200	0,02 ~ 0,15	50 ~ 200	0,02 ~ 0,10	50 ~ 150	0,02 ~ 0,10	70 ~ 300	0,05 ~ 0,20

Positive Inserts

80° Diamond Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	7°	CCGT 060201M NFC	●	6,35	2,38	2,8	<0,1
		060202M NFC	●				<0,2
		060204M NFC	●				<0,4
		CCGT 09T301M NFC	●				<0,1
		09T302M NFC	●				<0,2
	7°	09T304M NFC	●	9,525	3,97	4,4	<0,4
		CCGT 0602003 RFX	○				0,03
		0602003 LFX	○				0,03
		060201 RFX	○				0,1
		060201 LFX	○				0,1
		060202 RFX	●				0,2
		060202 LFX	●				0,2
		060204 RFX	●				0,4
		060204 LFX	●				0,4
		CCGT 09T3003 RFX	●				0,03
		09T3003 LFX	○				0,03
		09T301 RFX	●				0,1
		09T301 LFX	●				0,1
		09T302 RFX	●				0,2
		09T302 LFX	●				0,2
	7°	09T304 RFX	●				0,4
		09T304 LFX	●				0,4
		09T308 RFX	○				0,8
		09T308 LFX	○				0,8
		CCGT 03X1003 RFYS	○	3,5	1,4	1,8	0,03
		03X1003 LFYS	○				0,03
		03X101 RFYS	○				0,1
		03X101 LFYS	○				0,1
		03X102 RFYS	○				0,2
		03X102 LFYS	○				0,2
		03X104 RFYS	○				0,4
		03X104 LFYS	○				0,4
		CCGT 04X1003 RFYS	○				0,03
		04X1003 LFYS	○				0,03
		04X101 RFYS	○				0,1
		04X101 LFYS	○				0,1
		04X102 RFYS	○				0,2
		04X102 LFYS	○				0,2
		04X104 RFYS	○				0,4
	7°	04X104 LFYS	○				0,4
		CCGT 03X101 RFY	○	3,5	1,4	1,8	0,1
		03X101 LFY	○				0,1
		03X102 RFY	○				0,2
		03X102 LFY	○				0,2
		03X104 RFY	○				0,4
		03X104 LFY	○				0,4
		CCGT 04X101 RFY	○				0,1
		04X101 LFY	○				0,1
		04X102 RFY	○				0,2
		04X102 LFY	○				0,2
		04X104 RFY	○				0,4
		04X104 LFY	○				0,4
	7°	CCGT 09T301M NSI	●	9,525	3,97	4,4	<0,1
		09T302M NSI	●				<0,2
		09T304M NSI	●				<0,4
	7°	CCGT 0602003 NSC	○	6,35	2,38	2,8	0,03
		CCGT 060201M NSC	○				<0,1
		060202M NSC	●				<0,2
		060204M NSC	●				<0,4
		CCGT 09T3003 NSC	●				0,03
		09T301M NSC	●				<0,1
		09T302M NSC	●				<0,2
		09T304M NSC	●				<0,4
		09T308M NSC	●				<0,8

55° Diamond Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	7°	DCGT 070201M NFC	●	6,35	2,38	2,8	<0,1
		070202M NFC	●				<0,2
		070204M NFC	●				<0,4
		DCGT 11T301M NFC	●				<0,1
		11T302M NFC	●				<0,2
	7°	11T304M NFC	●	9,525	3,97	4,4	<0,4
		DCGT 0702003 RFX	○				0,03
		0702003 LFX	○				0,03
		070201 RFX	●				0,1
		070201 LFX	●				0,1
		070202 RFX	●				0,2
		070202 LFX	●				0,2
		070204 RFX	●				0,4
		070204 LFX	●				0,4
		DCGT 11T3003 RFX	○				0,03
		11T3003 LFX	○				0,03
		11T301 RFX	●				0,1
		11T301 LFX	●				0,1
		11T302 RFX	●				0,2
		11T302 LFX	●				0,2
	7°	11T304 RFX	●				0,4
		11T304 LFX	●				0,4
		DCGT 0702003 RFYS	○	6,35	2,38	2,8	0,03
		0702003 LFYS	○				0,03
		070201 RFYS	○				0,1
		070201 LFYS	○				0,1
		070202 RFYS	○				0,2
		070202 LFYS	○				0,2
		070204 RFYS	○				0,4
		070204 LFYS	○				0,4
		DCGT 11T3003 RFYS	○				0,03
		11T3003 LFYS	○				0,03
		11T301 RFYS	○				0,1
		11T301 LFYS	○				0,1
		11T302 RFYS	○				0,2
		11T302 LFYS	○				0,2
		11T304 RFYS	○				0,4
	7°	11T304 LFYS	○				0,4
		DCGT 0702003 RFY	○	6,35	2,38	2,8	0,03
		0702003 LFY	○				0,03
		070201 RFY	○				0,1
		070201 LFY	○				0,1
		070202 RFY	○				0,2
		070202 LFY	○				0,2
		070204 RFY	○				0,4
		070204 LFY	○				0,4
		DCGT 11T3003 RFY	○				0,03
		11T3003 LFY	○				0,03
		11T301 RFY	○				0,1
		11T301 LFY	○				0,1
		11T302 RFY	○				0,2
		11T302 LFY	○				0,2
		11T304 RFY	○				0,4
	7°	11T304 LFY	○				0,4
		DCGT 070201M NSI	●	6,35	2,38	2,8	<0,1
		070202M NSI	●				<0,2
		070204M NSI	●				<0,4
		DCGT 11T301M NSI	●				<0,1
		11T302M NSI	●				<0,2
		11T304M NSI	●				<0,4
		11T308M NSI	●				<0,8
		DCGT 0702003 NSC	○				0,03
		070201M NSC	●				<0,1
		070202M NSC	●				<0,2
	7°	070204M NSC	●				<0,4
		DCGT 11T3003 NSC	○	9,525	3,97	4,4	0,03
		11T301M NSC	●				<0,1
		11T302M NSC	●				<0,2
		11T304M NSC	●				<0,4
		11T308M NSC	●				<0,8

Note:
Different model notation applies to products with negative nose tolerance (M).

DCGT 11T304 M NSI

↓
Negative tolerance symbol

● Euro stock
○ Japan stock

For High Precision Turning

AC1030U

Positive Type Inserts

○ Square Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	7°	SCGT 09T302 RFX	○	9,525	3,97	4,4	0,2
		09T302 LFX	○				0,2
		09T304 RFX	○				0,4
		09T304 LFX	○				0,4
		SCGT 120404 RFX	○				0,4
	7°	120404 LFX	○	12,7	4,76	5,5	0,4
		SCGT 070201M NSC	○				<0,1
		070202M NSC	○				<0,2
		SCGT 09T301M NSC	○				<0,1
		09T302M NSC	○				<0,2

△ Triangular Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	5°	TBGT 060102 RFX	●	3,97	1,59	2,2	0,2
		060102 LFX	●				0,2
		060104 RFX	●				0,4
		060104 LFX	●				0,4
	5°	TBGT 060101 RFX	○	3,97	1,59	2,2	0,1
		060101 LFX	○				0,1
		060102 RFX	○				0,2
		060102 LFX	○				0,2
		060104 RFX	○				0,4
		060104 LFX	○				0,4
	5°	TBGT 060102 RW	●	3,97	1,59	2,2	0,2
		060102 LW	●				0,2
		060104 RW	●				0,4
		060104 LW	●				0,4
	7°	TCGT 090201 RFX	○	5,56	2,38	2,5	0,1
		090201 LFX	○				0,1
		090202 RFX	○				0,2
		090202 LFX	○				0,2
		TCGT 110201 RFX	○		6,35	2,38	0,1
		110201 LFX	○				0,1
		110202 RFX	○				0,2
		110202 LFX	○				0,2
	7°	TCGT 090201 RFX	○	5,56	2,38	2,5	0,1
		090201 LFX	○				0,1
		090202 RFX	○				0,2
		090202 LFX	○				0,2
		TCGT 110201 RFX	○		6,35	2,38	0,1
		110201 LFX	○				0,1
		110202 RFX	○				0,2
		110202 LFX	○				0,2
	7°	TCGT 110204M NSI	●	6,35	2,38	2,8	<0,4
	7°	TCGT 080201M NSC	○	4,76	2,38	2,3	<0,1
		080202M NSC	○				<0,2
		TCGT 090201M NSC	○		5,56	2,38	<0,1
		090202M NSC	○				<0,2
		TCGT 110201M NSC	○				<0,1
	11°	110202M NSC	●	6,35	2,38	2,8	<0,2
		110204M NSC	●				<0,4
		TPGT 110302M NFC	○		6,35	3,18	<0,2
		110304M NFC	○				<0,4
	11°	TPGT 080202 RFX	○	4,76	2,38	2,4	0,2
		080202 LFX	○				0,2
		080204 RFX	○				0,4
		080204 LFX	○				0,4
		TPGT 110302 RFX	●		6,35	3,18	0,2
		110302 LFX	●				0,2
		110304 RFX	●				0,4
		110304 LFX	●				0,4
		110308 RFX	○				0,8
		110308 LFX	○				0,8
		TPGT 160304 RFX	○		9,525	3,18	0,4
		160304 LFX	○				0,4
		160308 RFX	○				0,8
		160308 LFX	○				0,8

△ Triangular Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	11°	TPGT 0802003 RFX	○	4,76	2,38	2,4	0,03
		0802003 LFX	○				0,03
		080201 RFX	○				0,1
		080201 LFX	○				0,1
		080202 RFX	○				0,2
		080202 LFX	○				0,2
		080204 RFX	○				0,4
		080204 LFX	○				0,4
		TPGT 090201 RFX	○		5,56	2,38	0,1
		090201 LFX	○				0,1
		090202 RFX	○				0,2
		090202 LFX	○				0,2
		090204 RFX	○				0,4
		090204 LFX	○				0,4
		TPGT 1103003 RFX	○		6,35	3,18	0,03
		1103003 LFX	○				0,03
		110301 RFX	○				0,1
		110301 LFX	○				0,1
		110302 RFX	○				0,2
		110302 LFX	○				0,2
		110304 RFX	○				0,4
		110304 LFX	○				0,4
	11°	110308 RFX	○		9,525	3,18	0,8
		110308 LFX	○				0,8
		TPGT 160302 RFX	○			4,4	0,2
		160302 LFX	○				0,2
		160304 RFX	○				0,4
		160304 LFX	○				0,4
		160308 RFX	○				0,8
		160308 LFX	○				0,8
		TPGT 080202 RW	○	4,76	2,38	2,4	0,2
		080202 LW	○				0,2
		080204 RW	●				0,4
		080204 LW	●				0,4
		TPGT 110302 RW	●		6,35	3,18	0,2
		110302 LW	●				0,2
		110304 RW	●				0,4
		110304 LW	●				0,4
	11°	TPGT 110302 RSD	○	6,35	3,18	3,4	0,2
		110302 LSD	○				0,2
		110304 RSD	○				0,4
		110304 LSD	○				0,4
		110308 RSD	○				0,8
		110308 LSD	○				0,8

◇ 35° Diamond Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	5°	VBGT 110301 RFX	○	6,35	3,18	2,8	0,1
		110301 LFX	○				0,1
		110302 RFX	○				0,2
		110302 LFX	○				0,2
		110304 RFX	○				0,4
		110304 LFX	○				0,4
	5°	VBGT 1103003 RFYS	○	6,35	3,18	2,8	0,03
		1103003 LFYS	○				0,03
		110301 RFYS	○				0,1
		110301 LFYS	○				0,1
		110302 RFYS	○				0,2
		110302 LFYS	○				0,2
		110304 RFYS	○				0,4
		110304 LFYS	○				0,4
		110308 RFYS	○				0,8
	5°	VBGT 110301 RFX	○	6,35	3,18	2,8	0,1
		110301 LFX	○				0,1
		110302 RFX	○				0,2
		110302 LFX	○				0,2
		110304 RFX	○				0,4
		110304 LFX	○				0,4

● Euro stock

Positive Type Inserts

35° Diamond Type

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	5°	VBGT 110301M NSI	○	6,35	3,18	2,8	<0,1
		110302M NSI	○				<0,2
		110304M NSI	○				<0,4
		110308M NSI	○				<0,8
		VBGT 160401M NSI	○	9,525	4,76	4,4	<0,1
		160402M NSI	○				<0,2
		160404M NSI	○				<0,4
		160408M NSI	○				<0,8
	7°	VCGT 080204M NFC	○	4,76	2,38	2,3	<0,4
		VCGT 110301M NFC	●	6,35	3,18	2,8	<0,1
		110302M NFC	●				<0,2
		110304M NFC	●				<0,4
	7°	VCGT 110301 RFX	●	6,35	3,18	2,8	0,1
		110301 LFX	●				0,1
		110302 RFX	●				0,2
		110302 LFX	●				0,2
		110304 RFX	○				0,4
		110304 LFX	●				0,4
	7°	VCGT 110301 RFY	○	6,35	3,18	2,8	0,1
		110301 LFY	○				0,1
		110302 RFY	○				0,2
		110302 LFY	○				0,2
		110304 RFY	○				0,4
		110304 LFY	○				0,4
	7°	VCGT 110301M NSI	●	6,35	3,18	2,8	<0,1
		110302M NSI	●				<0,2
		110304M NSI	●				<0,4
		110308M NSI	●				<0,8
		VCGT 160401M NSI	●	9,525	4,76	4,4	<0,1
		160402M NSI	●				<0,2
		160404M NSI	●				<0,4
		160408M NSI	○				<0,8

TrigonType

Shape	Relief Angle	Cat. No.	Grade	Dimensions (mm)			
			AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	5°	WBG 060102 RFX	●	3,97	1,59	2,2	0,2
		060102 LFX	●				0,2
		060104 RFX	●				0,4
		060104 LFX	●				0,4
		WBG 080202 RFX	○	4,76	2,38	2,4	0,2
		080202 LFX	○				0,2
		080204 RFX	○				0,4
		080204 LFX	○				0,4
	5°	WBG 060102 RFY	○	3,97	1,59	2,2	0,2
		060102 LFY	○				0,2
		060104 RFY	○				0,4
		060104 LFY	○				0,4
	5°	WBG 060102 RW	●	3,97	1,59	2,2	0,2
		060102 LW	●				0,2
		060104 RW	●				0,4
		060104 LW	●				0,4

Negative Type Inserts

Triangular Type

Shape	Cat. No.	Grade	Dimensions (mm)			
		AC1030U	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	TNGG 160402 RFY	○	9,525	4,76	3,81	0,2
	160402 LFY	○				0,2
	160404 RFY	○				0,4
	160404 LFY	○				0,4
	160408 RFY	○				0,8
	160408 LFY	○				0,8
	TNGG 160402 RFX	○	9,525	4,76	3,81	0,2
	160402 LFX	○				0,2
	160404 RFX	○				0,4
	160404 LFX	○				0,4
	160408 RFX	○				0,8
	160408 LFX	○				0,8

GNDIS Grooving Inserts

Shape	Type	Cat. No.	Grade	Dimensions (mm)				
			AC1030U	Cutting Width	Tolerance	r_e	ℓ	s
	ML	GXM N2002S ML	○	2,0	±0,03	0,2	11,1	3,1
		N3002S ML	○	3,0	±0,03	0,2	11,1	3,1
	GF	GXM N150005S GF	○	1,5	±0,03	0,05	11,1	3,1
		N2002S GF	○	2,0	±0,03	0,2	11,1	3,1
		N3002S GF	○	3,0	±0,03	0,2	11,1	3,1

● Euro stock
○ Japan stock



(Germany)
SUMITOMO ELECTRIC Hardmetall GmbH
Konrad-Zuse-Straße 9, 47877 Willich

Tel. +49(0)2154 4992-0, Fax +49(0)2154 4992-161
Info@SumitomoTool.com
www.SumitomoTool.com



(UK and Ireland)
SUMITOMO ELECTRIC Hardmetal Ltd.
Summerleys Road, Princes Risborough
Buckinghamshire HP27 9PW, UK

Tel. +44(0)1844 342081, Fax: +44(0)1844 342415
enquiries@sumitomo-hardmetal.co.uk
www.SumitomoTool.com

